

JetNet 3710Gf

Industrial 8 PoE + 2 Gigabit SFP Switch



- Eight 10/100 TX PoE plus two gigabit SFP uplink ports
- DC 48V input, deliver 8 port PoE @48V
- 802.3af compliant PoE: Total power budget is 65W* with max. 15.4W per port
- Two gigabit SFP ports for larger uplink bandwidth of surveillance
- Support QoS for optimizing video and VoIP stream
- -25~70°C operating temperature



Overview

JetNet 3710Gf is an Industrial PoE Switch designed with 8 Fast Ethernet PoE ports and 2 Gigabit SFP uplink ports to ensure high-bandwidth uplink connection for large-scale surveillance system networks. The PoE injection ports can deliver up to 65W* per unit (@70°C) to power PoE-enabled devices. Moreover, the compact size with aluminum alloy metal enclosure allows JetNet 3710Gf to reliably operate under -25~70°C wide temperature range applications.

Gigabit bandwidth and QoS supported

JetNet 3710Gf features eight PoE ports and two uplink


gigabit SFP fiber ports. Customers can connect up to 8 IP cameras and provide guaranteed large image uplink bandwidth connection. In addition, the JetNet 3710Gf supports QoS to ensure the high quality of video traffic transmission by simply adjusting the priority of data transfer.

Fault Relay function provided

JetNet 3710Gf provides fault relay to automatically warn users if any abnormal situation occurs. As a result, users can quickly handle the emergency and shorten the failover time.

*Specifications may change without prior notice

Dimensions (Unit = mm)

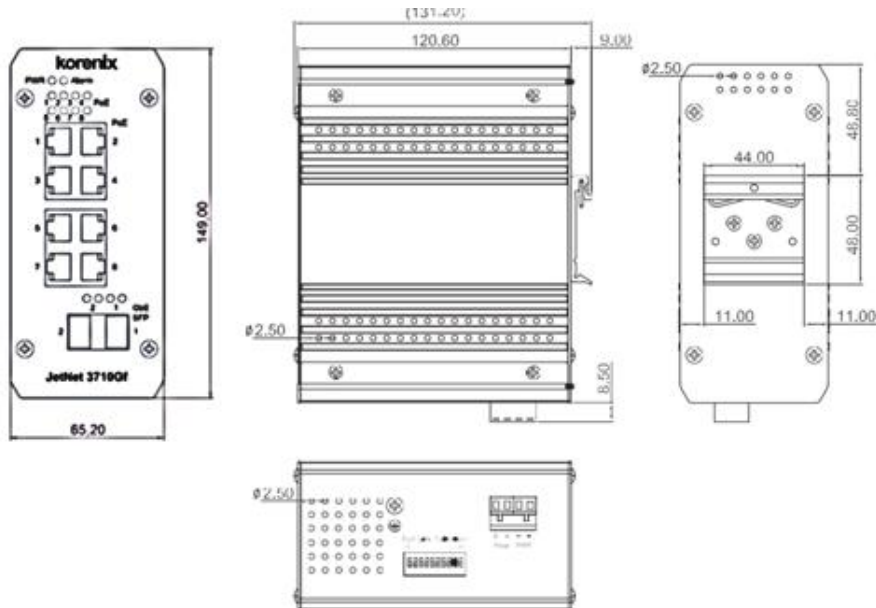

Specifications

Technology

Standard:

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX Fast Ethernet
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control and Back-pressure
 IEEE 802.3af Power Over Ethernet
 IEEE 802.1p Class of Service

Performance

Switch Technology: Store and Forward Technology with 32Gbps Switch Fabric

System Throughput: 14,880pps for 10M Ethernet, 148,800pps for 100M Fast Ethernet, 1,488,100pps for Gigabit Ethernet

Transfer packet size: 64 bytes to 1522 bytes (with untagged and tagged frames)

MAC Address: 8k

Packet Buffer: 1 Mbits

Interface

Configuration: 802.3af compliant PoE ports x 8
 1000M Fiber ports x 2
 Auto MDI/MDI-X, Auto Negotiation

Cables:

10 Base-T: 2-pair UTP/STP Cat. 3,4,5 cable (100m)
 100 Base-Tx: 2-pair UTP/STP Cat. 5 cable (100m)
 10Base-T: 4-pair UTP/STP Cat 3,4,5, 100ohm (100m) for PoE
 100Base-Tx: 4-pair UTP/STP Cat.5, 100ohm (100m) for PoE

LED per unit:

PoE (Green) x8
 Fault alarm (Red) x1
 Power on/ off (Green on/ off) x1
 Gigabit fiber: Link/ Activity (Green on/ blinking) X2
 Gigabit fiber: Speed (Yellow Blinking) X2

LED on Ethernet port:

Link/ Activity (Green on/ blinking)
 Full duplex/ Collision (Yellow on/ Blinking)

Relay Alarm: Dry Relay output with 1A@24V ability

PoE Technology: Alternative B

PoE Output Voltage: 48V / 65W

Power Requirements

Power Input: 48V

Power Consumption: 7W@DC 48V without PD loading



Mechanical

Construction:

Rugged Aluminum Alloy Chassis

Mounting: DIN-Rail

Dimension:

66(W) x 149(H) x 131.2(D) mm (with Din-rail clip)

Net weight: 1.05kg

Environment

Operating Temp: -13 ~ 158°F(-25 ~ 70°C), 5 to 95% RH

Storage Temp: -40 ~ 176°C(-40 ~ 80°C), 5 to 95% RH

EMI: FCC class A, CE/EN55022 Class A

EMC: EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11

Shock: IEC60068-2-27 (50g peak acceleration)

Vibration: IEC60068-2-6 (5g/5~500Hz/random operation)

MTBF: greater than 200,000 hours @ 25°C

Warranty: 5 years

Ordering Information

JetNet 3710Gf Industrial 8 PoE+2Gigabit SFP Switch

Includes:

- JetNet 3710Gf
- Attached 4-pin power terminal block
- Quick installation guide